

Axial Lead Metallized Polyester Film Capacitor -ZZEC




CL20(MET) FEATURES

- Metallized polyester film, axial lead, coated with high temperature adhesive tape, the epoxy potting.
- Flat circular or cylindrical, low noise.
- Low dissipation factor.
- Good self-healing property, good stability and reliability.

APPLICATIONS


Widely used in various DC and impulse circuits, such as electronic equipment, communication and audio sets.

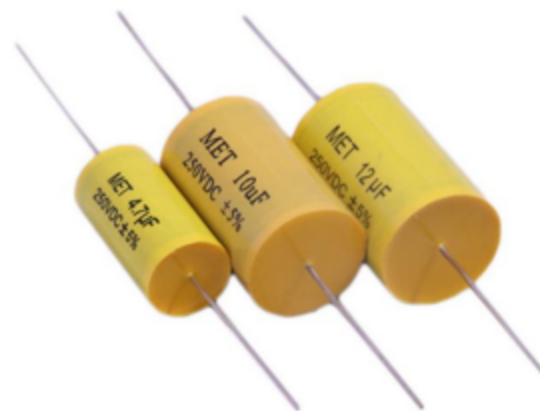

SPECIFICATIONS

Climatic Category	40/100/21
Rated Voltage	100V、250V、400V、630
Capacitance Range	0.001Mf ~6.8µF
Capacitance Tolerance	±5%(J), ±10%(K),
Voltage Proof	1.6U _n
Insulation resistance	≥3000MΩ, CR≤0.33µF(20℃、1min)
	≥10 000S, CR>0.33µF(20℃、1min)
Tangent of loss angle	≤0.008 %(23℃、1KHZ)

DRAWING: (mm)

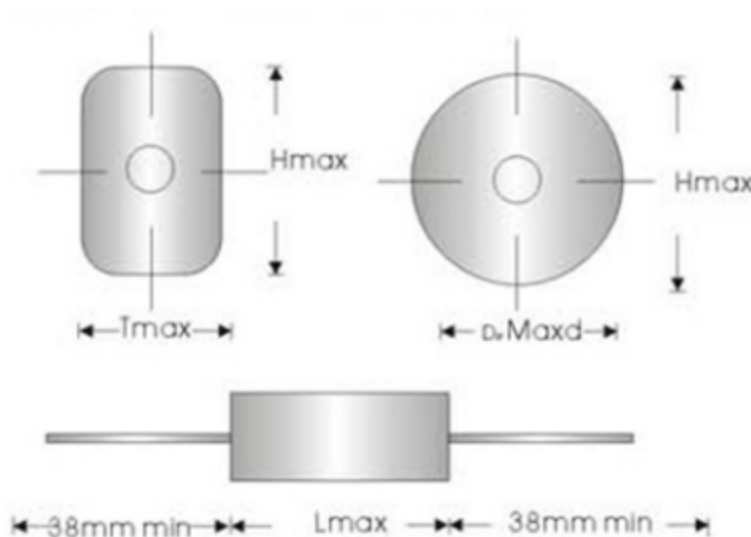

Axial Lead Metallized Polyester Film Capacitor -ZZEC

STANDARD SIZE

Dimensions(mm) and special specifications can product according to your demand.

CAP (μ F)	Cylindrical						Flat Circular								
	250V		400V		630V		250V			400V			630V		
	D	L	D	L	D	L	L	T	H	L	T	H	L	T	H
0.01	5.5	14	5.5	14	5.5	14	14	5	8	14	5	8	14	5	8
0.015	5.5	14	5.5	14	5.5	14	14	5	8.5	14	5	8	14	5	8
0.022	5.5	14	5.5	14	6.5	14	14	5	8.5	14	5	8.5	14	5	8.5
0.033	5.5	14	5.5	14	6.5	14	14	5	8.5	14	5	8.5	19	5	9
0.047	6.5	14	6	19	7.5	19	14	5	8.5	14	5	8.5	19	5	9
0.068	6.5	14	6.5	19	8.5	19	14	5	8.5	19	5	8.5	19	6	11
0.1	6.5	14	7.5	19	10	19	14	5	8.5	19	5	8.5	19	7	11
0.22	6.5	14	9.5	19	11.5	25	19	5	9	19	6.5	12	25	7	13.5
0.33	7.5	19	11.5	19	14	25	19	5	9	19	9	14	25	10	17
0.47	8.5	19	11	25	14	31	19	6	10	25	7.5	14	31	10	16.5
0.68	10	19	13	25	17	31	19	7.5	11	25	10	15	31	12	18
1	10	24	14	31	19	31	25	7	12	31	10	17	31	15	21.5
2.2	12	31	18	36	23.5	40	31	8	15	36	13.5	20	40	20	28
3.3	14.5	31	21	36	27	46	31	11	17.5	36	18	24	46	25	31
4.7	17.5	31	22	40	33	46	31	12.5	19	36	19.5	26	46	27	34
5.6	19.5	31	24	46	31	56	31	13.5	20.5	40	18	24	46	29	37
6.8	16	46	22.5	57	33.5	56	31	14	21	46	20	28	56	27	34
8.2	17.5	46	25	57	36	56	46	13	19.5	57	17.5	24.5	56	30	37.5
10	19.5	46	27	57	41	56	46	14	20	57	21	27	56	33	39
15	24	46	34	57			46	16	23	57	23	29	56	37	43
22	29	46	39	57			46	20	26.5	57	30	37			
30	29	56					46	24.5	31	57	35	44			
33	30	56					56	26.5	33						
47	36.5	56					56	32	39						
68	41	61					61	37.5	45						

Please visit our website to get more update data, those data & specification are subject to change without notice.